



SINOLTECH ENERGY LIMITED

SHANDONG SINOLTECH INTERNATIONAL CO., LTD



SINOLTECH

INTEGRITY . HIGH BRIGHTNESS . EASY-INSTALL

SPECIAL SHAPE ALL-IN-ONE SOLAR LIGHT SERIES
5 - Years Product Warranty

MODEL SELECTION:

- SNSTY-Y230
- SNSTY-S15

SINOLTECH SERVICE:

- OEM and ODM service
- Dialux report
- Instruction(or video) if you don't know how to install
- If not work, exchange spare part or new product, free of charge under warranty 5 years

ALL IN ONE SOLAR STREET LIGHT

SPECIAL SHAPE: 30W ROUND

30W

SNSTY-Y230



LED TECHNICAL DATA

Item	Description
LED Rated Power(W)	30W
LED Brand	EPISTAR 3528
LED NO.(pcs)	200
Lamp Lumens(LM)	3000~3300LM
Output Voltage	DC 12V
Input Voltage	DC 18V
Waterproof Degree	IP65
CRI	78
Suitable for pole diameter	60-90 mm
LED beads Irritation angle	120 degree
Illumination efficiency	>0.95
CCT	3000~6000
LED life time	50000 hrs
Working Temperature	-30°C~+60°C
Working Humidity	15~90%RH

SOLAR LIGHT TECHNICAL DATA

Item	Description
Main Material	Aluminum Alloy+Solar PV
Solar Panel Power(W)	50W
Solar Cell Brand	Solarworld Germany
Battery Capacity	Lithium 18 AH
Lamp Lumens(LM)	3000~3300LM
Mounting Height	5-6 m
Mounting Distance	20~25m for one-way road, 40-50m for two-way road, intercross distance
Working Method	Timer control, Motion sensor, APP





Packing Detail:

Product size/Weight: 735*45mmmm/13 KG

Pack size/Volume: 800*800*150mm /0.096CBM

Gross Weight: 15KG

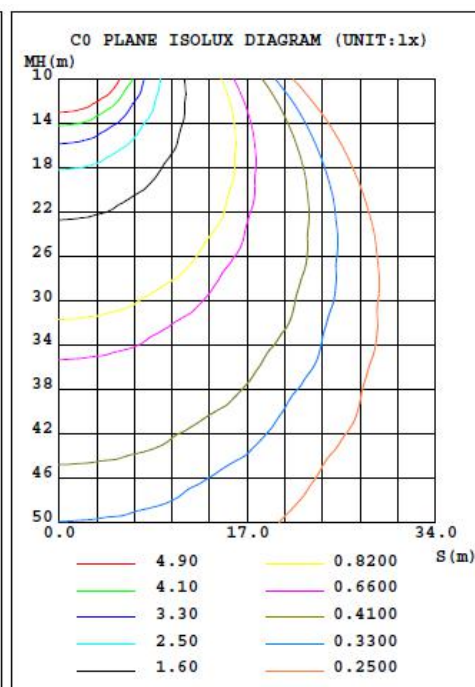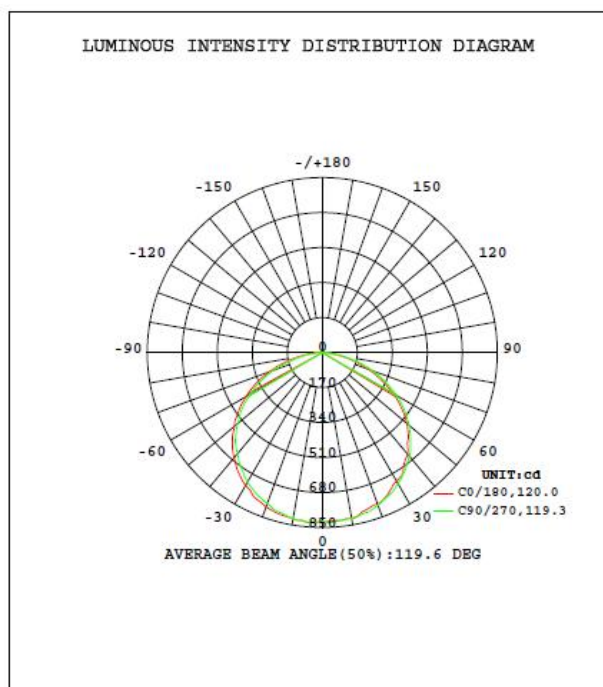


TECHNICAL DATA SHEET

ALL IN ONE SOLAR STREET LIGHT

SPECIAL SHAPE: 15W FAN

15W

SNSTY-S15

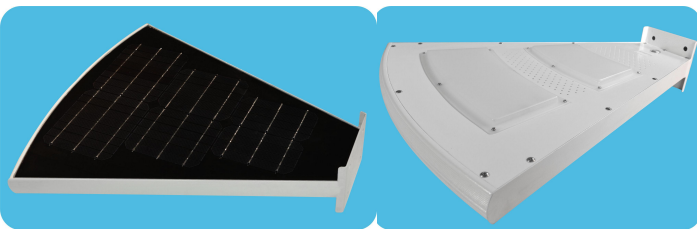

LED TECHNICAL DATA



Item	Description
LED Rated Power(W)	15W
LED Brand	EPISTAR 3528
LED NO.(pcs)	100
Lamp Lumens(LM)	1600~1700LM
Output Voltage	DC 12V
Input Voltage	DC 18V
Waterproof Degree	IP65
CRI	78
Suitable for pole diameter	60-90 mm
LED beads Irritation angle	120 degree
Illumination efficiency	>0.95
CCT	3000~6000
LED life time	50000 hrs
Working Temperature	-30°C~+60°C
Working Humidity	15~90%RH

SOLAR LIGHT TECHNICAL DATA

Item	Description
Main Material	Aluminum Alloy+Solar PV
Solar Panel Power(W)	22W
Solar Cell Brand	Solarworld Germany
Battery Capacity	Lithium 12 AH
Lamp Lumens(LM)	1600~1700LM
Mounting Height	3-8 m
Mounting Distance	15~20m for one-way road, 30-40m for two-way road, intercross distance
Working Method	Timer control, Motion sensor

Packing Detail:

Product size/Weight: 650*520*140*40mm
 Net weight: 7.2 KG
 Pack size/Volume: 700*650*200mm /0.10 CBM
 Gross Weight: 8 KG

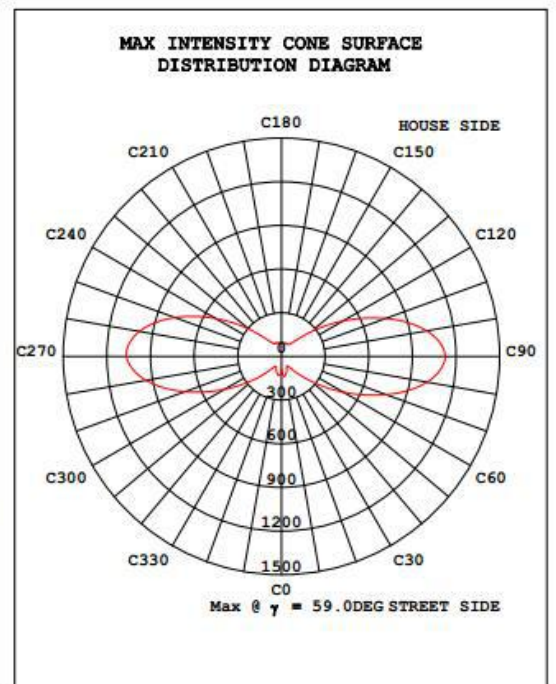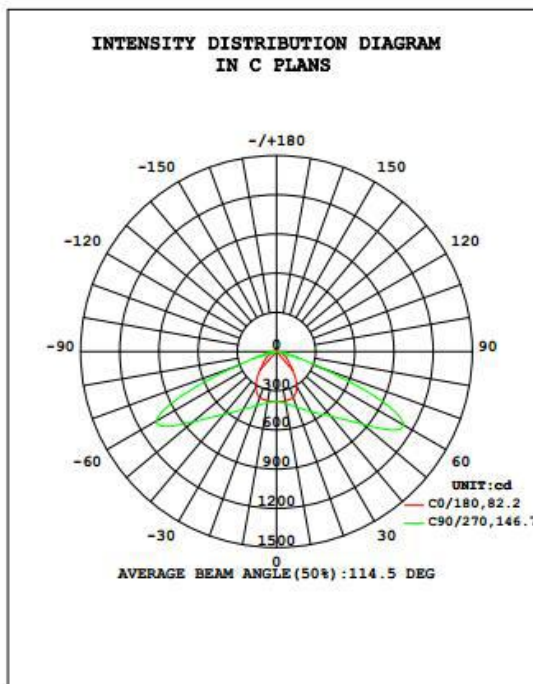

TECHNICAL DATA SHEET